PLYMIVENT®

clean air at work

BACKDRAFT KIT

BACKDRAFT KIT FOR DOWNDRAFT TABLE

Backdraft kit for welding and plasma cutting applications, consisting of narrowing plates to be mounted underneath the work grid and a backdraft panel with vertical lamellas.

The backdraft kit is compulsory for all welding applications and recommended for grinding applications. By the use of a backdraft kit, the downdraft extraction capacity is reduced to approx. 20%. The remaining 80% is extracted through the backdraft panel.



APPLICATIONS

The backdraft kit is intended to be used for the following applications:


- MIG-MAG/GMAW welding
- TIG welding
- FCAW welding
- stick/MMAW welding
- grinding
- polishing
- plasma cutting (combined with plasma cutting work grid only)

SPECIFICATIONS


■ Physical dimensions and properties	
Dimensions (L x W x H)	1326 x 153 x 650 mm (52.2 x 6 x 25.6 in.)
Material	sheet metal
Colour	black RAL 9005 (gloss level 85%)
Weight (net)	38,5 kg (84.9 lbs)
■ Product combinations	
DraftMax Basic	downdraft table with disposable filter
DraftMax Advance	downdraft table with manual self-cleaning filter
DraftMax Ultra	downdraft table with automatic self-cleaning filter
Available options/accessories	
Side panels	
Working light	
Movement sensor	automatic start/stop device (downdraft table type DraftMax Ultra only)
scope of supply	
Backdraft panel - Narrowing plate (2)	
■ Order information	
Article number	0040200020
Number/package	1

■ Shipping data	
Gross weight	40 kg (88.2 lbs)
Packing dimensions	1345 x 165 x 700 mm (53.0 x 6.5 x 27.6 in.)
Harmonized Tariff Code	8421.39.2090
Country of origin	the Netherlands

DIMENSIONS

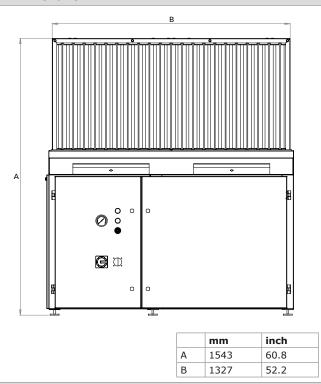

Downdraft table with backdraft kit (front view)

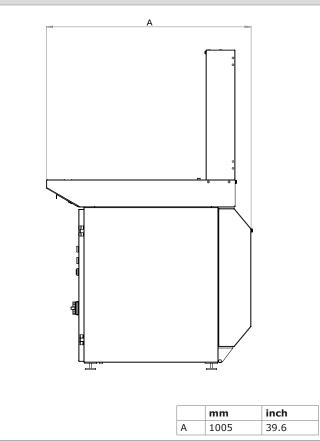

Downdraft table with backdraft kit (side view)

Product type Article no. Product categor Backdraft kit 0040200020

oduct category options and access

020312/C

Always check the latest version on **www.plymovent.com**.